


PERFORMANCE:

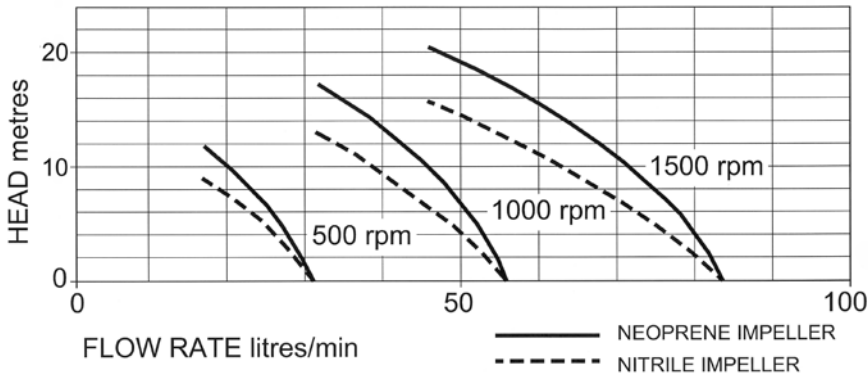


MODEL	Maximum flow rate		Maximum head	
	l/min	gall/min	metres	feet
50080-2**1	82	18	20	65
50080-2**3	82	18	18	59

Max Power absorbed 550 watt at 1500rpm

DIMENSIONS:

WEIGHT: 5 Kg

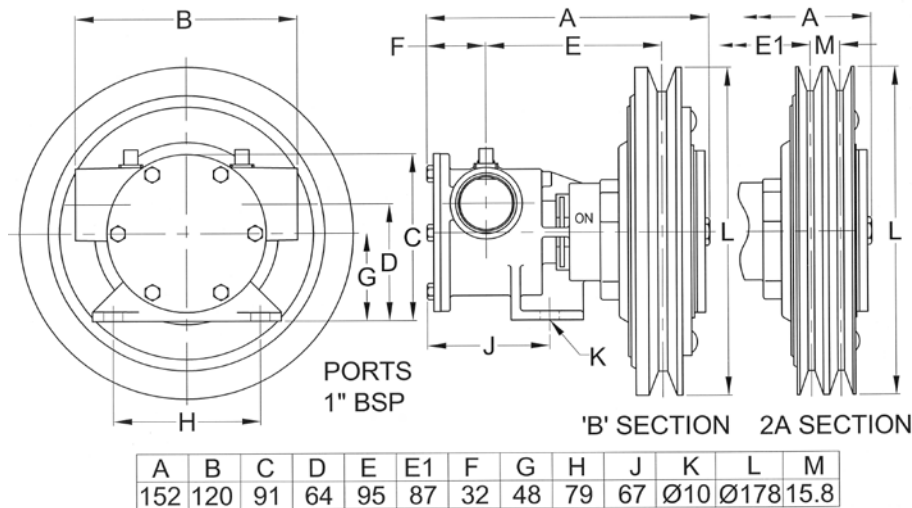

MATERIALS OF CONSTRUCTION:

Body	Bronze
Impeller	Neoprene or oil resistant Nitrile
Wearplate	Replaceable
Shaft	Stainless steel type 316
Shaft seal	Lip type
Bearings	Twin row, ball type
Port type	1" BSP to BS21 (DIN2999)
Clutch type	Electro-magnetic 12v or 24v dc
Pulley	178mm dia A or B section

MODELS:

50080-2001	12v 2A groove, Neoprene Impeller
50080-2101	24v 2A groove, Neoprene Impeller
50080-2201	12v 1B groove, Neoprene Impeller
50080-2301	24v 1B groove, Neoprene Impeller
50080-2003	12v 2A groove, Nitrile Impeller
50080-2103	24v 2A groove, Nitrile Impeller
50080-2203	12v 1B groove, Nitrile Impeller
50080-2303	24v 1B groove, Nitrile Impeller



a xylem brand

**BRONZE FLEXIBLE
IMPELLER ELECTRO
MAGNETIC CLUTCH**

50080 SERIES



**PUMP with (Lip Seal)
1" BSP PORTS**

- * Constructed from marine quality bronze and stainless steel
- * Self-prime from dry up to 2.4m
- * Easy to service and maintain
- * Will tolerate abrasive wear
- * Handles hard and soft solids without clogging
- * Can pump in either direction
- * Will not airlock

Xylem Water Solutions UK Ltd
Bingley Road
Hoddesdon
Hertfordshire • EN11 0BU UK

Tel: +44 (0)1462 480380
Fax: +44 (0)1462 482422
mail@cleghorn.co.uk
www.jabscoshop.com

