



PERFORMANCE:

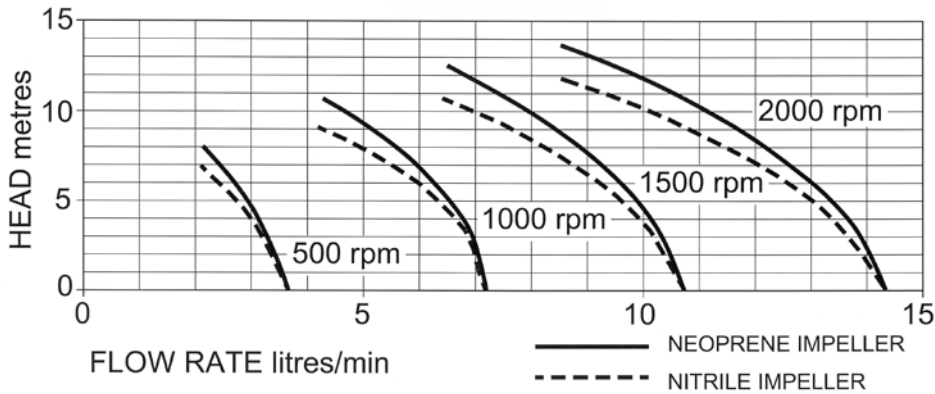

MODEL	Maximum flow rate		Maximum head	
	l/min	gall/min	metres	feet
AL1/4-200	14	3	13.5	44
AL1/4-237	14	3	12	39

DIMENSIONS:

WEIGHT: 0.69Kg

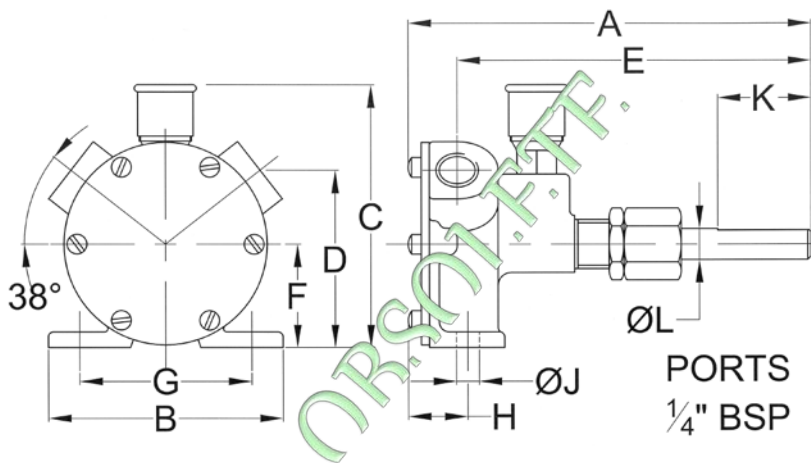

A	B	C	D	E	F	G	H	J	K	L
123	72	80	54	108	32	53	18	Ø7	29	Ø9.5

MATERIALS OF CONSTRUCTION:

Body	Bronze
Impeller	Neoprene or Nitrile
Shaft	Stainless steel type 316
Shaft seal	Packed gland
Bearings	Plain
Port type	1/4" BSP to BS21 (DIN2999)

MODELS:

AL1/4-200 Standard Neoprene Impeller

AL1/4-237 Oil resistant Nitrile



BRONZE FLEXIBLE IMPELLER PEDESTAL PUMP

AL1/4 SERIES



PUMP with 1/4" BSP PORTS

- * Constructed from marine quality bronze and stainless steel
- * Self-prime from dry up to 1.5m
- * Easy to service and maintain
- * Will tolerate abrasive wear
- * Handles hard and soft solids without clogging
- * Can pump in either direction
- * Will not airlock